



CS 100-COVE

Epoxy Trowel Mortar System, for vertical surfaces

Description

CS 100-COVE is an epoxy mortar specifically designed for cove bases and vertical applications. Each unit of **CS 100-COVE** consists of a special mixture of solventless epoxy, natural sand aggregates, and fine powder to facilitate the application and grip on vertical surfaces. It provides excellent physical properties in addition to excellent resistance to impact and abrasion. It is used in conjunction with other epoxy systems to create a seamless, square or round joint between the walls and the floor. This system has been approved by the Canadian Food Inspection Agency (CFIA).

This system is composed of:

1. Primer coat (CS 100-COVE primer)
2. Basecoat (CS 100-COVE) 3mm 1/8ⁱⁿ rounded at the floor wall junction
3. 1st sealing grout coat (CS 100-OP) colored 10 -15 mils
4. 2nd sealing grout coat (CS 100-OP) colored 10-15 mils
5. Top coat (CS 100) colored 8-10 mils
6. Optional 2nd top coat of (CS100-725/CS 100-3500) 3-8 mils

Primary applications

- ✓ Pharmaceutical production areas
- ✓ Assembly areas
- ✓ Classrooms
- ✓ Refineries
- ✓ Waste treatment plants
- ✓ Laboratories
- ✓ Areas of light to heavy manufacturing
- ✓ Mechanical rooms
- ✓ Etc.

Advantages

- ✓ Contains 100% solids, allowing for interior applications without harmful odors
- ✓ Ideal to facilitate cleaning of floor-wall junctions
- ✓ Superior compression strength
- ✓ Impact resistant
- ✓ Can be used on large vertical surfaces
- ✓ Impermeable and seamless
- ✓ Dense surface resistant to bacteria and moisture and easy to clean
- ✓ Excellent adhesive properties, allowing for application on a wide variety of substrates
- ✓ May apply several layers on itself with excellent adhesion



CS 100-COVE

Epoxy Trowel Mortar System,
for vertical surfaces

TECHNICAL DATA

Packaging CS 100-COVE 11.4 kg (A/B) C Available in 25.7 kg		Color			
1.29 liters	11.4 kg	Part A	Part B	Part C	Mixture
Recommended Thickness		On Request	Creamy white	Sand	Wet sand
Primer	8 mils / 200 ft ² us gal	Shelf Life			
Base coat 4 in radius 1 in	15 linear feet per unit	12 months in original unopened factory sealed containers. Keep away from extreme cold, heat, or moisture. Keep out of direct sunlight and away from fire hazards.			
Each additional sealer coat	10-15 mils / 106-160 ft ² us gal				
Top coat	8-10 mils / 160-200 ft ² us gal	<p>The recommended mileage is calculated for a baseboard with a radius of 25mm / 1" and a height of 100mm / 4in by 25mm / 1" shaped to a thickness of 3mm (1 / 8in)</p> <p>Also consult the technical data sheets of the individual products in the CS 100-COVE system</p>			
Mix Ratio by volume					
A : B : C = .86 L / .43 L / 10 kg Always mix full units					
<p><i>*Please note that the indicated mileage is calculated for flat surfaces. A porous or imperfect surface will require more material in order to cover the same mileage.</i></p>					
Pot life (150g)	VOC (g/litre)	Density (kg/litre)			
35 - 45 minutes 25°C	-	Part A	Part B	Mixture	
Solids by weight %	Recommended Thinner	-	-	-	
100%	xylene	-	-	-	
Substrate Temperature		10°C	20°C	30°C	
Waiting Time /Overcoatability (min / max)		24 / 72	8 / 48	5 / 24	
Curing Details	Foot traffic	-	-	-	
	Light traffic	-	-	-	
	Full cure and chemical resistance	10 days	7 days	5 days	
<p><i>*Note: Times and data mentioned are based on laboratory conditions. Field results may vary and will be affected by changing ambient conditions, especially changes in temperature and relative humidity.</i></p>					

PROPERTIES @ 23°C (73°F) 50% R.H.

Bond Resistance (psi) ASTM D4541	Permeability (%) ASTM D570
250 (substrate ruptures)	-
Hardness (Shore D) ASTM D2240	Tensile Strength (psi) ASTM D638
82 - 85	5200
Compressive Strength ASTM D695	Elongation (%) ASTM D638



CS 100-COVE

Epoxy Trowel Mortar System, for vertical surfaces

6000	10 %			
Abrasion Resistance, ASTM D4060 (CS17/1000 cycles/ 1000 g)	Viscosity @ 25 °C (cps)	Part A	Part B	Mixture
0.15 gram		-	-	-

SURFACE PREPARATION

The surface to be coated must be well primed. Remove dust, laitance, grease, oils, dirt, impregnating agents, waxes, foreign matter, any previous coatings, and disintegrated substances by mechanical means such as shot-blasting (BLASTRAC) or any other approved method to obtain an ICRI-CSP 3-4 profile. The compressive strength of the concrete must be at least 25 MPa (3625 lbs/in²) after 28 days and the tensile strength at least 1.5 MPa (218 lbs/in²).

MIXING

The products must be conditioned at a temperature between 18 °C (65 °F) and 30 °C (86 °F).

How to prepare part A and B for the system

Mix the resin part (A) perfectly before pouring the hardener (part B) according to the indicated mixing ratio. Depending on product amount and size of mixing equipment, mix for 1 to 3 minutes at low speed (300 to 450 rpm). During mixing, scrape the walls and bottom of the container at least once with a trowel to obtain a homogeneous mixture.

How to prepare the epoxy mortar A/B/C

Transfer the A/B mixture into a mixing tank for mortars (Ted Baugh mixer – Kol mixer) and gradually incorporate (Part C) and mix for 2-3 minutes until all the aggregates are evenly incorporated. Immediately spread the mixture on the primed surface. As the pot life is limited, prepare amount of desired product as required in order to avoid any loss.

Important: To not see a difference in color between mixes always mix for the same amount of time between each mixture



CS 100-COVE

Epoxy Trowel Mortar System, for vertical surfaces

APPLICATION

APPLICATION : Primer coat CS 100-COVE primer

Apply the coating using a rubber squeegee and pass a roller to obtain a uniform coating.

APPLICATION : Base coat CS 100--COVE

On the damp or sticky surface apply the base coat on the vertical surface using a stainless steel trowel and smooth with a rounded stainless steel trowel; use a slip agent (SCT- 200) to facilitate the work.

APPLICATION: Sealing grout coat same color as the top coat.


Apply the sealing grout coat (CS 100 OP colored) with a brush or a roller and force the penetration of the epoxy with a steel, plastic or rubber spatula to fill the irregularities of the surface. Pass a roller to make the sealing layer uniform. Two to three layers may be required depending on the finish of the base coat.

APPLICATION : Top coat

Apply the finish coat (CS 100 colored) using a roller or a brush to obtain a uniform coating.

OPTIONAL : Top coat

Replace the CS 100 topcoat by an aliphatic or a chemical resistant topcoat, depending on desired application.

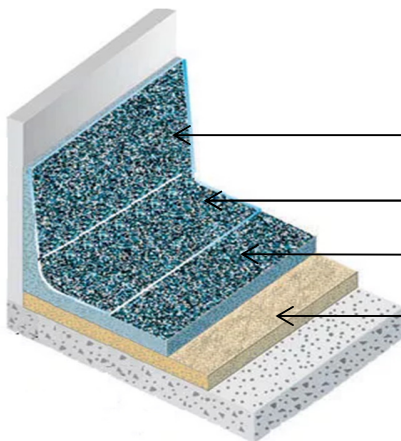

CS 100 Topcoat colored (8-10 mils) /
Optional Aliphatic Topcoat CS-725 /CS 100-3500

CS 100-OP colored (10-15 mils) / 2 coats

CS 100-COVE 3mm 1/8in rounded

CS 100-COVE primer



limirescu

rsolution

www.icrsolution.com



CS 100-COVE

Epoxy Trowel Mortar System, for vertical surfaces

CLEANING

Clean all application equipment with the recommended cleaner (SOLVENT 01). Once the product has hardened, it can only be removed by mechanical means. In case of skin contact, wash thoroughly with warm soapy water.

RESTRICTIONS

- ✓ Do not apply at temperatures below 10 ° C / 50 ° F or above 30 ° C / 86 ° F
- ✓ The relative humidity of the surrounding work environment during the application of the coating and throughout the curing process should not exceed 85%
- ✓ Substrate temperature must be 3 ° C (5.5 ° F) above dew point measured
- ✓ Humidity content of substrate must be <4% when coating is applied
- ✓ Do not apply on porous surfaces where a transfer of humidity may occur during the application
- ✓ The application of this coating on an interior or exterior substrate without a moisture barrier is at risk of detachment (by hydrostatic pressure).
- ✓ Protect the coating from all sources of moisture for a period of 48 hours
- ✓ Surface may discolor in areas exposed to regular ultraviolet light

HEALTH AND SAFETY

In case of skin contact, wash with water and soap. In case of eye contact, immediately rinse with water for at least 15 minutes. Consult with a doctor. For respiratory problems, transport victim to fresh air. Remove contaminated clothes and clean before reuse. Components A and B contain toxic ingredients. Prolonged contact of this product with the skin is susceptible to provoke an irritation. Avoid eye contact. Contact with may cause serious burns. Avoid breathing vapors release from this product. This product is a strong sensitizer. Wear safety glasses and chemical resistant gloves. A breathing apparatus filtering organic vapors approved by the NIOSH/MSHA is recommended. Predict suitable ventilation. Consult the material safety data sheet for further information.



CS 100-COVE

**Epoxy Trowel Mortar System,
for vertical surfaces**

IMPORTANT NOTICE

The information and recommendations contained in this document are based on reliable test results according to ICR COATING SYSTEMS. The data mentioned are specific to the material indicated. If used in combination with other materials, the results may be different. It is the responsibility of the user to validate the information therein and to test the product before using it. ICR COATING SYSTEMS. assumes no legal responsibility for the results obtained in such cases. ICR COATING SYSTEMS. assumes no legal responsibility for any direct, indirect, consequential, economic or any other damages except to replace the product or to reimbursement the purchase price, as set out in the purchase contract.
